



模组规格	伺服 W	丝杠		最大速度 (mm/s)	最大负载(水平) (KG)	最大负载(垂直) (KG)	重复定位精度 (mm)	行程			
		外径d	导程l					最小行程	最大行程		
TSY	150	400	16	5	L	250	123	53	±0.02	100	1200
		400	16	10	N	500	38	21	±0.02	100	1200
		400	16	16	H	800	16	10	±0.02	100	1200
	220	750	20	5	L	250	270	90	±0.02	100	1200
		750	20	10	N	500	90	40	±0.02	100	1200
		750	20	20	H	1000	19	11	±0.02	100	1200
		1000	25	5	L	250	400	150	±0.02	100	1200
	320	1000	25	10	N	500	150	60	±0.02	100	1200
		1000	25	25	H	1250	32	19	±0.02	100	1200
		1500	32	5	L	250	300	100	±0.02	100	1000
	1500	32	10	N	500	100	50	±0.02	100	1000	
	1500	32	20	H	1000	30	20	±0.02	100	1000	

备注：L-低速250mm/s；N-中速500mm/s；H-高速1000mm/s

TSY150

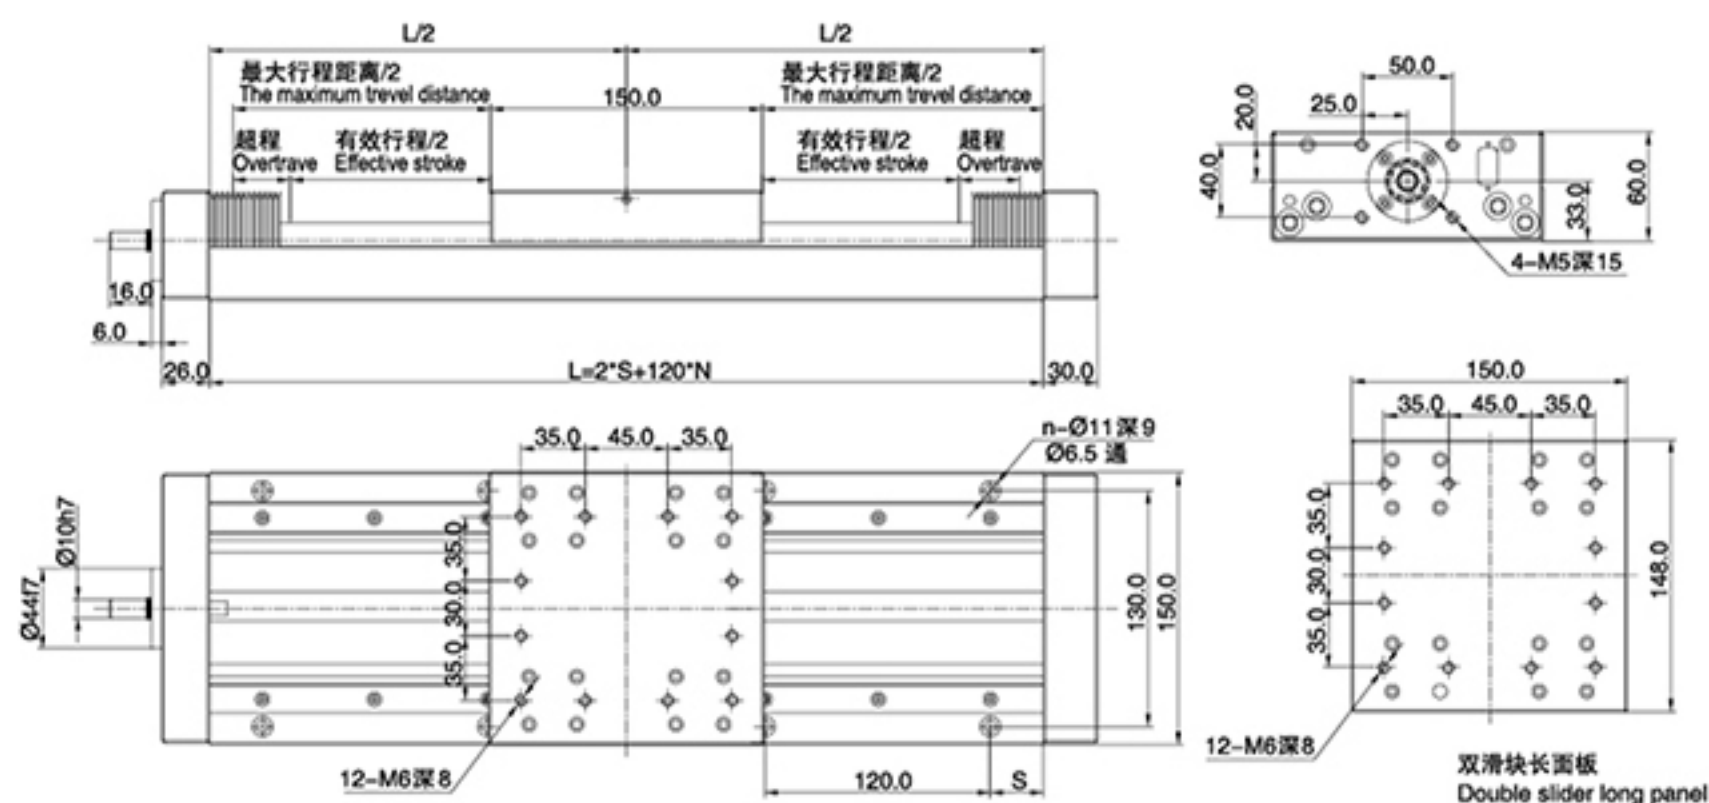

TSY220

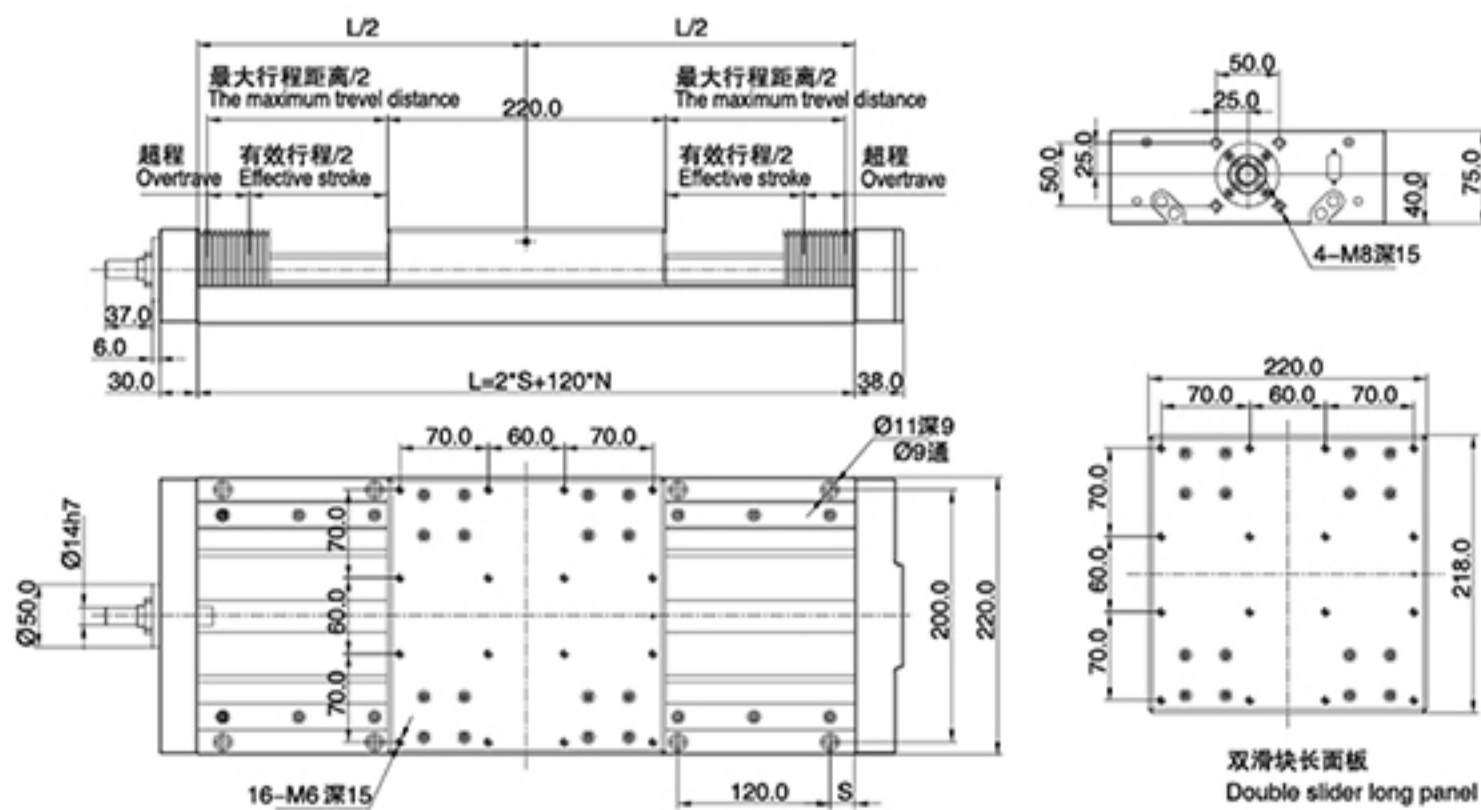

TSY320

