


型号 (TYPE) : YFU

转造级库存螺杆系列 (Stock Rollded Ball Screw Series)

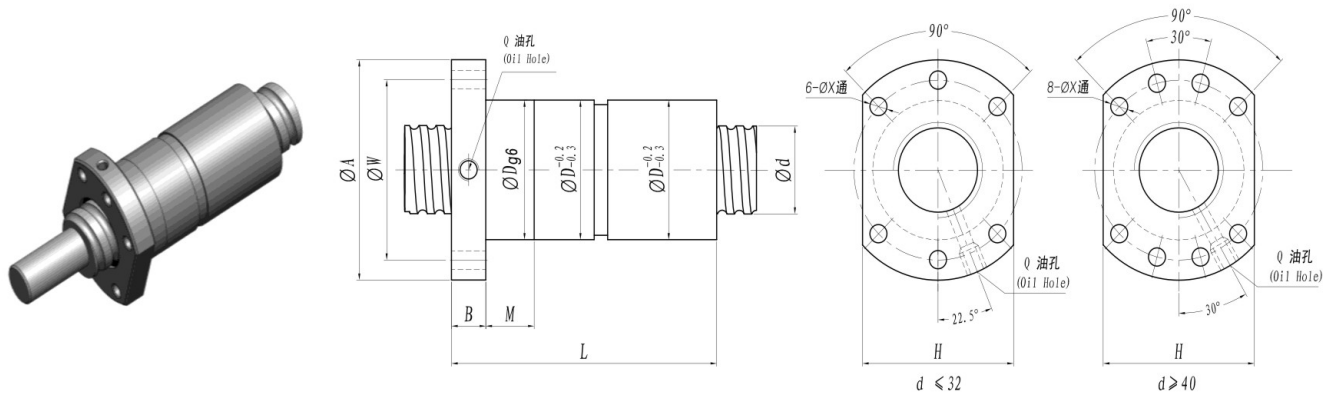

单位 (Unit) : mm

I: 导程 Lead Da: 球径 Ball Dia. n: 球圈数 Number of Circuits
 Ca: 动额定负荷 Basic Dynamic Rating Load (Kgf)
 Coa: 静额定负荷 Basic Static Rating Load (Kgf)

型号 Model No.	滚珠丝杆, 螺母基准数据 Dimensions														
	d	l	Da	D	A	B	M	L	W	X	H	Q	n	Ca	Coa
YFU1604-3	15.3	4	2.381	28	50	10	12	72	38	5.5	39	M6	3	435	920
★ YFU1605-3	15	5	3	28	50	10	12	88	38	5.5	39	M6	3	765	1320
YFU2004-3	19.5	4	2.381	33	55	10	15	79	44	5.5	47	M6	3	600	1010
YFU2005-3	19	5	3	35	57	10	15	96	46	5.5	50	M6	3	1430	2150
YFU2010-3	19.35	10	3.175	36	57	10	15	98	46	5.5	50	M6	3	1050	1770
YFU2504-3	24.3	4	2.381	38	64	12	15	78	51	6.5	52	M6	3	610	1040
★ YFU2505-3	24	5	3	40	66	12	15	115	53	6.5	55	M6	3	1590	2720
YFU2510-3	24.5	10	3.969	42	68	12	15	135	55	6.5	57	M6	3	1120	2420
★ YFU3205-4	31.6	5	3.5	48	80	15	20	115	65	6.5	66	M8	4	2160	4000
YFU3210-3	31.6	10	5.556	52	83	15	20	152	67	6.5	69	M8	3	2550	4690
YFU3220-4	31	20	3.969	52	83	15	20	145	67	6.5	69	M8	4	2295	3706
YFU4005-5	39.58	5	3.5	55	88	15	20	120	70	9	72	M8	5	2910	6410
★ YFU4010-3	39.51	10	7.144	64	100	18	25	146	81	9	83	M8	3	3910	9520
YFU4020-3	38	20	6	64	100	18	25	195	81	9	83	M8	3	3790	6280
YFU5005-5	49	5	3.5	68	107	18	25	120	85	11	92	M8	5	3150	8030
YFU5010-4	49.31	10	7.144	75	115	18	25	178	92	11	96	M8	4	4340	9070
YFU5020-3	48.15	20	6.35	77	117	18	25	196	94	11	98	M8	3	4780	8750
YFU5040-2	48	40	6.5	77	117	18	25	156	94	11	98	M8	2	3210	5580
YFU6310-4	62.55	10	7.144	86	132	22	30	205	107	13	110	M8	4	7400	17860
YFU6320-3	62.55	20	7.144	95	142	22	30	208	116	13	118	M8	3	5320	11210
YFU8010-4	80	10	7.144	105	152	22	30	232	125	13	125	M8	4	8440	22710
YFU8020-4	80	20	12.7	125	170	22	30	315	145	13	145	M8	4	15226	35749

备注: 有标注★记号者可制作左旋螺纹 Note: with sign ★ can produce left helix